

TECHNICAL DATA SHEET




Product Description : FIREX

General Specifications				
Density	15/30	kg/m3	± 10%	-
Colour	White/Grey	-	-	-

Composition	
Raw Material	Empregnated polyurethane foam

Technical Tests				
Hardness	> 200	kN	-	ISO 2439 (ILD 40%)
Tensile Strength	> 70	Kpa	-	ISO 1798
Elongation at Break	> 70	%	-	ISO 1798
Fire Behaviour	0	mm/min		EC 95/28

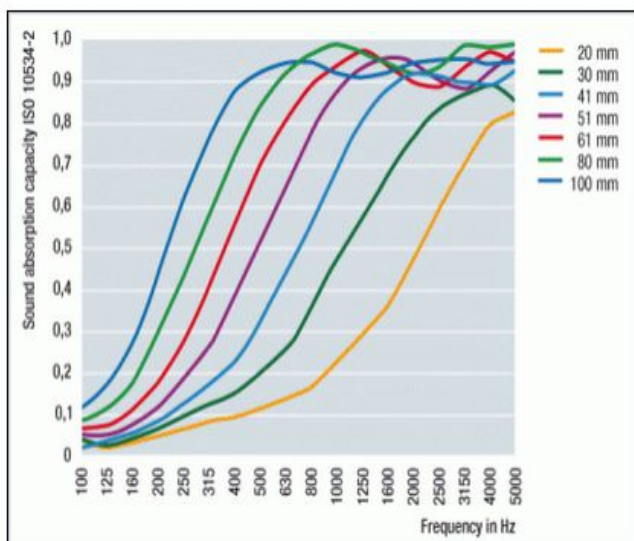

Fire behaviour		
Europe	CEN/TS 45545-2 EN 13501-2	upon request B/C
Germany	DIN 4102-1 DIN 5510-2	B1 S4, ST2, SR2 FEDs1
France	NF P 92-507 NF F 16-101	M1 F4
USA	FMVSS 302 UL 94	compliant (0 mm/min) V-0 HF-1
	ASTM E 662 ASTM E 162 ASTM E 84 ASTM D 2863 (ISO 4589-2) ASTM E 1354	upon request upon request upon request upon request upon request
Great Britain	BS 476 part 7 part 6 BS 6853 Annex D.8.4 BS 6853 Annex B2	Class 1 upon request upon request upon request